

AgroBee-L 1/2 installation in box format

SUPPLIED MATERIAL



Coordinating plate



Screw M2x6mm



Antenna cable 10 meters + antenna

Material	Material supplied in:	
	1 Coordinator	2 coordinators
AgroBee-L coordinator plate	1	2
Antenna cable	1	2
Antenna	1	2
M2x6 Nylon screws	2	4


BOX FORMAT ASSEMBLY

- 1 Disconnect power from the Agrónic 4500.

- 2 Remove the four screws.




- 3 Lift the keyboard.

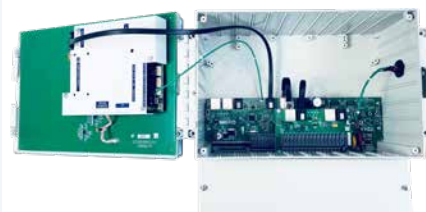


- 4 Remove the four screws from the aluminum cover that protects the micro plate as shown in the following image.

Fastening screws

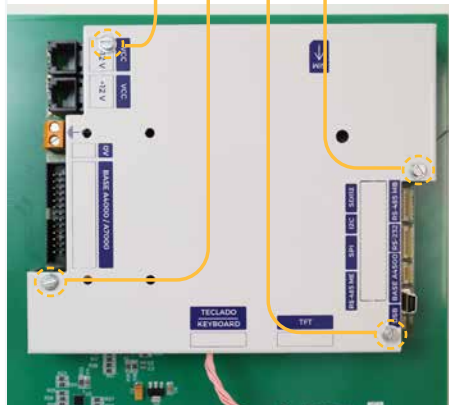

- 5 Place the AgroBee-L coordinator plate or plates and secure them with the screws and washers supplied as indicated in the following image.

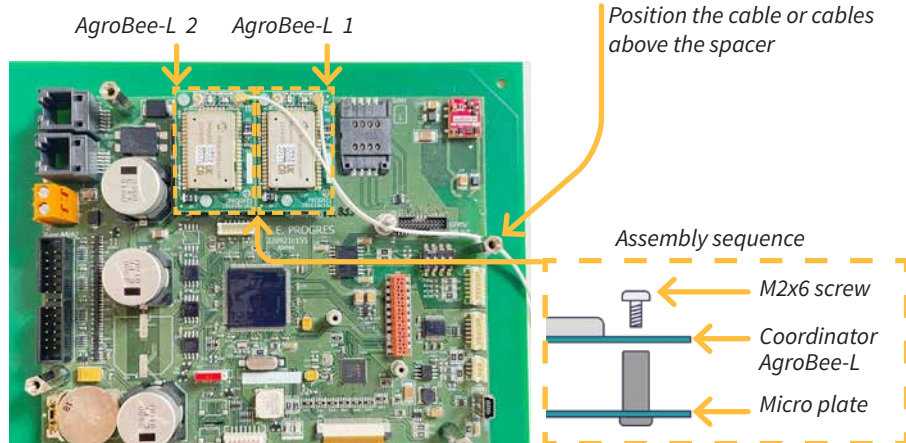


- 6** Replace the aluminum protective cover.



- 8** Place the coordinator connector into the box.




- 7** If the box is die cut, break out the holes using a hammer and punch or similar. If it is not die cut, make a 6.5 mm hole according to the dimensions indicated below.

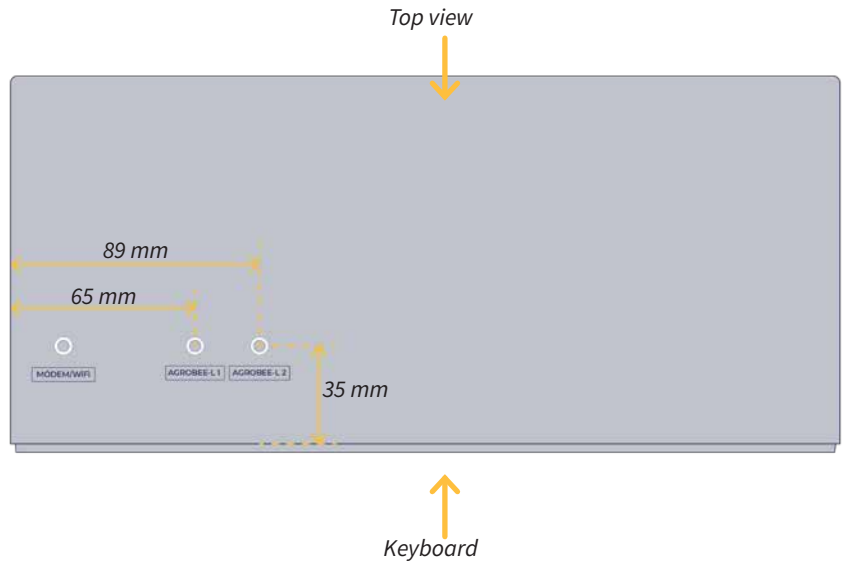


- 9** Screw in the antenna cable and power up the unit to check that the installed plates are read correctly. To verify this, go to:

Consult - 16. Agrónic

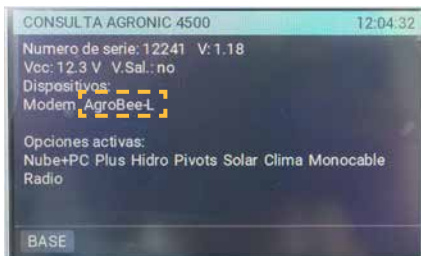


Consult - 15. Modules - 'F1'

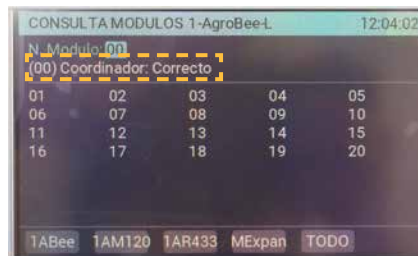

AgroBee-L 1/2 installation in built-in format

SUPPLIED MATERIAL

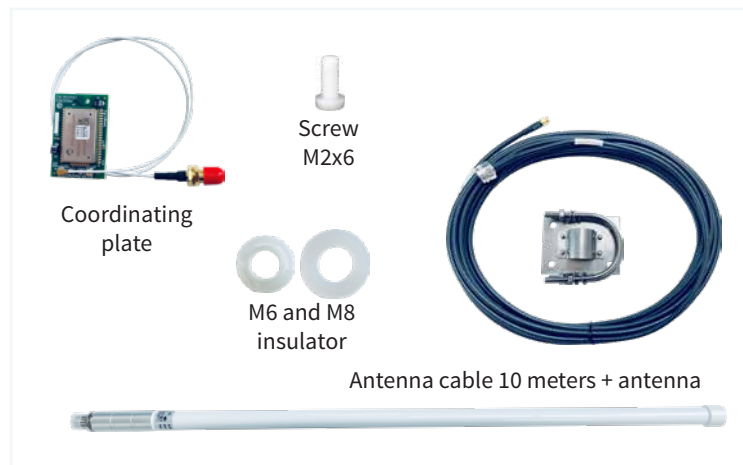


Material	Material supplied in:	
	1 Coordinator	2 coordinators
AgroBee-L coordinator plate	1	2
Antenna cable	1	2
Antenna	1	2
M2x6 Nylon screws	2	4
Insulator M6	1	2
M8 insulating washer	1	2


BUILT-IN FORMAT ASSEMBLY

- 1 Disconnect power from the Agrónic 4500.

- 4 Remove the four screws from the aluminum cover that protects the micro plate as shown in the following image.

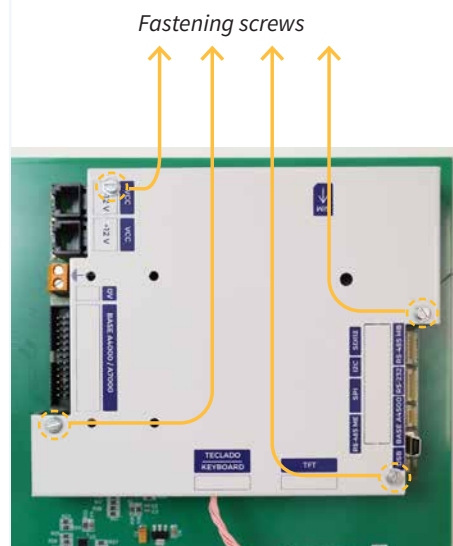


- 2 Remove the six side screws.

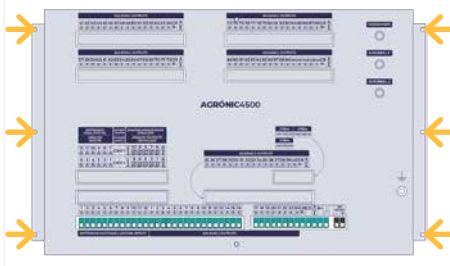


- 3 Separate the keyboard from the box.



- 5 Place the AgroBee-L coordinator plate or plates and secure them with the screws and washers supplied as indicated in the following image.

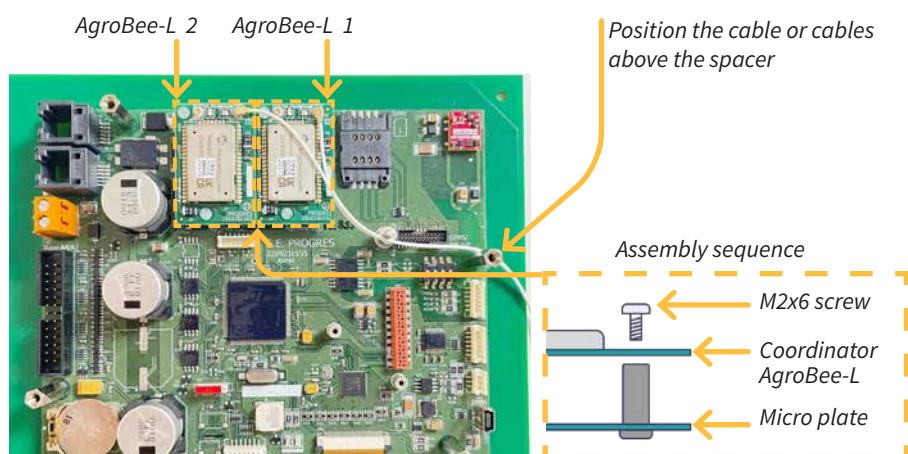


- 6** Replace the aluminum protective cover.




- 8** Place the coordinator connector into the drawer as shown below.

Connector + M8 + drawer + M6 + nut

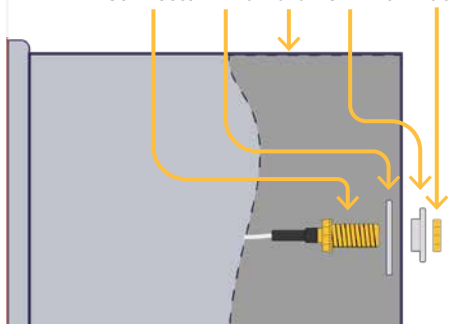


- 7** If the drawer is die cut, break out the holes using a hammer and punch or similar. If it is not die cut, make an 8 mm hole according to the dimensions indicated below.

Rear view

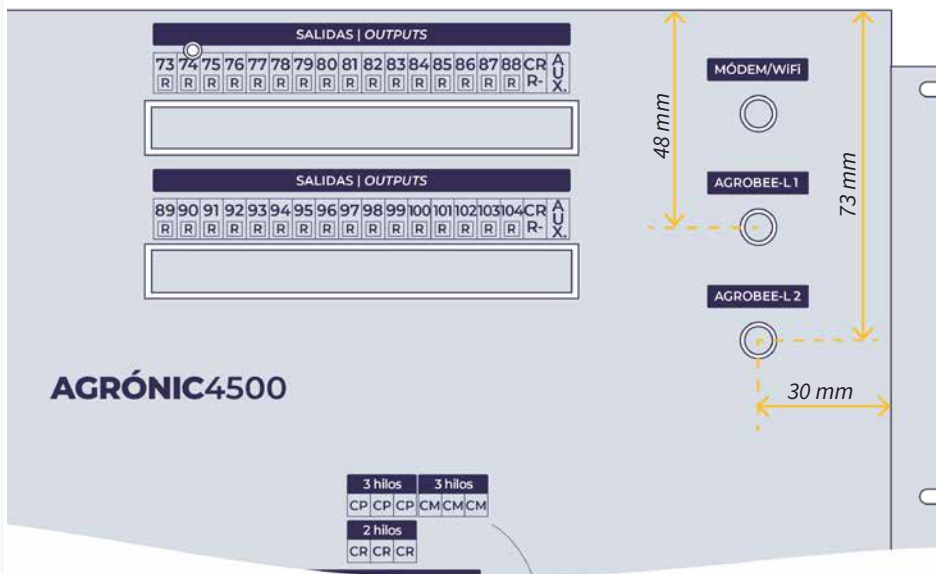

- 9** Screw in the antenna cable and power up the unit to check that the installed plates are read correctly. To verify this, go to:

Consult - 16. Agrónic

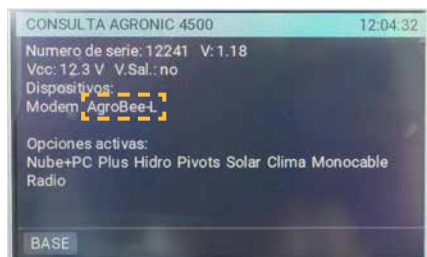

Consult - 15. Modules - 'F1'

