



INCLUDED MATERIALS:

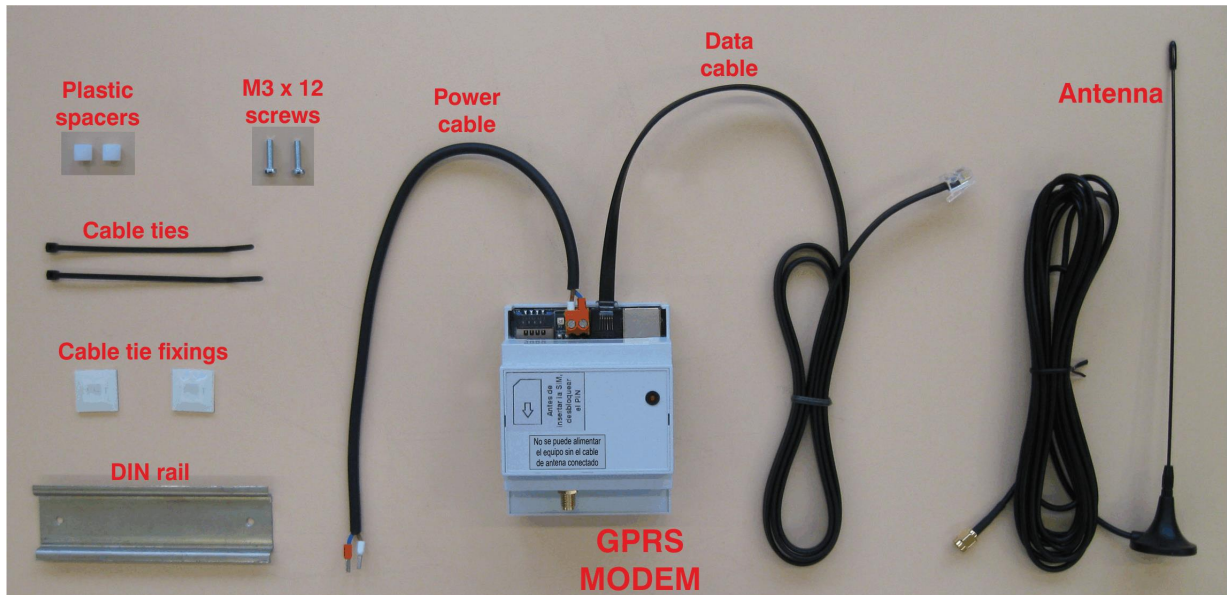


INSTALLATION:

- A. Disconnect the equipment from a power supply.
- B. At the base of the equipment, remove 2 screws and their washers, place the supplied DIN rail, place the 2 plastic spacers, washers, and M3x12 screws supplied, without placing the glower washers. See **1** in photo.
- C. Place the cable tie fixings provided in the indicated place. See **2** in photo.

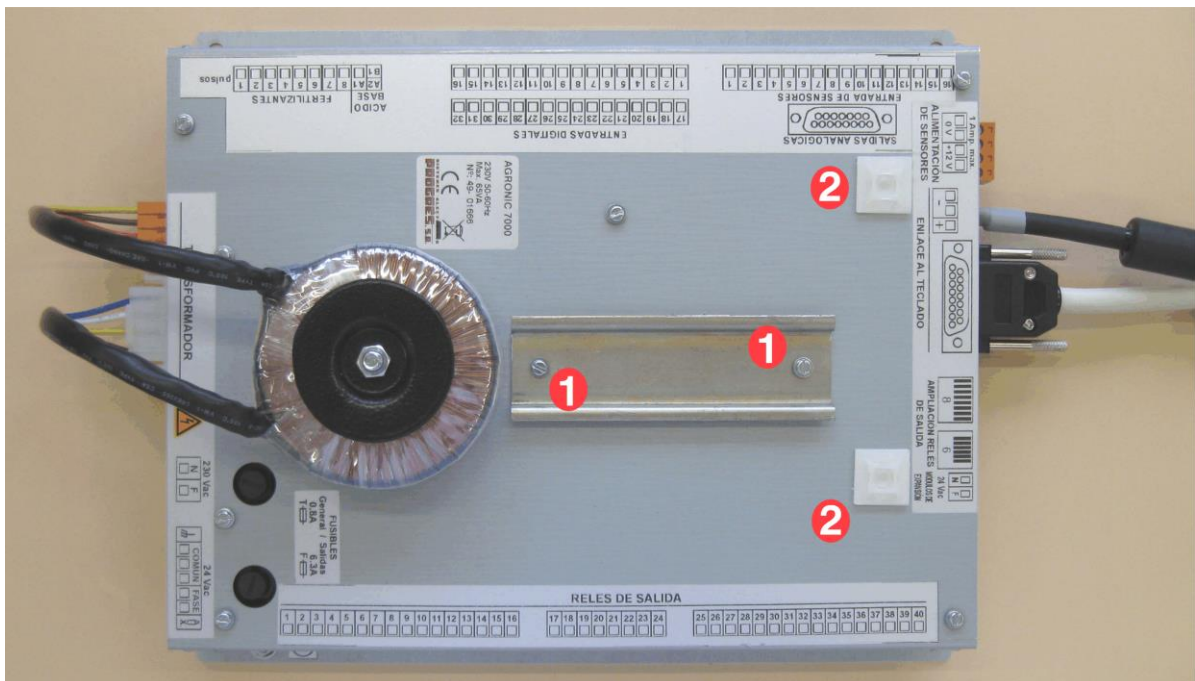

- D. Place the GPRS modem on the DIN rail. See **3** in photo.
- E. Fix the data and power cables using the 2 supplied cable ties. See **4** in photo.

- F. Connect the power cable of the GPRS modem to the "Sensor power" terminal (**Blue: +12 V / Brown: 0 V**). See **5** in photo.
- G. Place the SIM card in the corresponding slot, having previously deactivated the PIN code of the card. See **6** in photo.
- H. Connect the antenna placing it at a high point so you have the best visibility to the GSM / GPRS central and get a correct coverage. See **7** in photo.

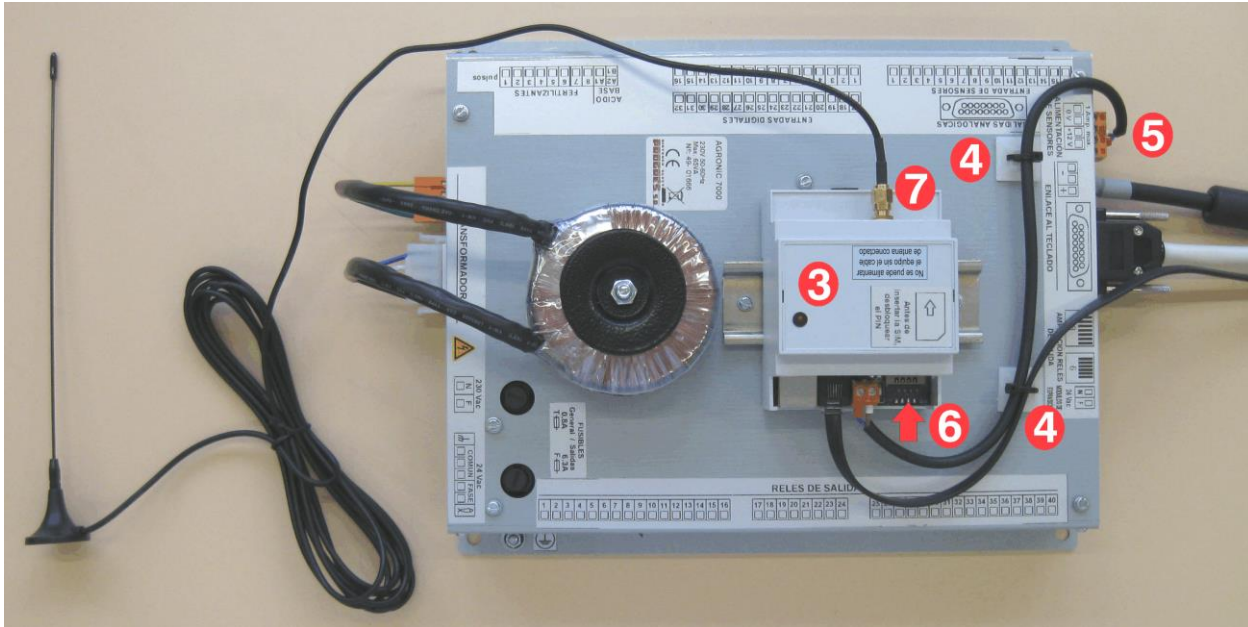

- I. On the equipment keyboard, connect the data cable from the GPRS modem to the RS232 port. See **8** in photo.



- J. If all of the steps for installing the GPRS modem have been completed, the only thing left is to turn on the equipment and perform the corresponding configuration, using the manual provided.

Do not turn on the equipment without first having connected the antenna; otherwise, the modem may suffer damage.