

Replacing the front of the Agrónic 7000 to Agrónic 4500 for built-in model

SUPPLIED MATERIAL



Agrónic 4500 frontal built-in model

Agrónic 4500 front panel for built-in model:

- Agrónic 4500 micro plate
- Agrónic 4500 keyboard
- Integrated GPRS/4G or WiFi modem -
- Integrated eSIM card -
- Antenna


BUILT-IN FORMAT ASSEMBLY

- 1** Disconnect power from the Agrónic 7000


- 2** Disconnect the two connectors that link the relay plate to the Agrónic 7000 keyboard.




- 3** Check whether the unit has any telephone cables connected to the keyboard. If so, disconnect them as they will become unusable.

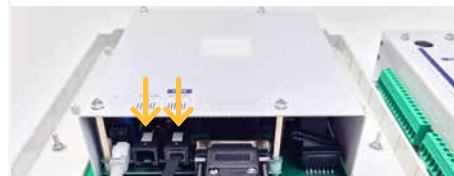

- 4** If the Agrónic 7000 has the GPRS modem option, remove the modem, the antenna and also the power cable that is connected to the relay plate. (The Agrónic 4500 is supplied with its modem and eSIM plate)

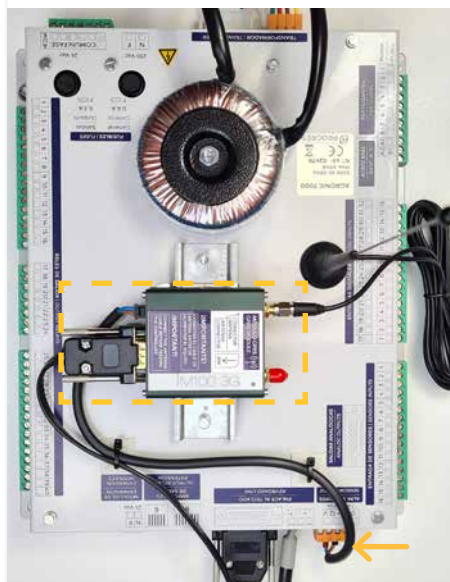

- 5** Connect the cable with the two connectors to the new Agrónic 4500 front panel and screw the antenna onto the modem as shown in the following image.

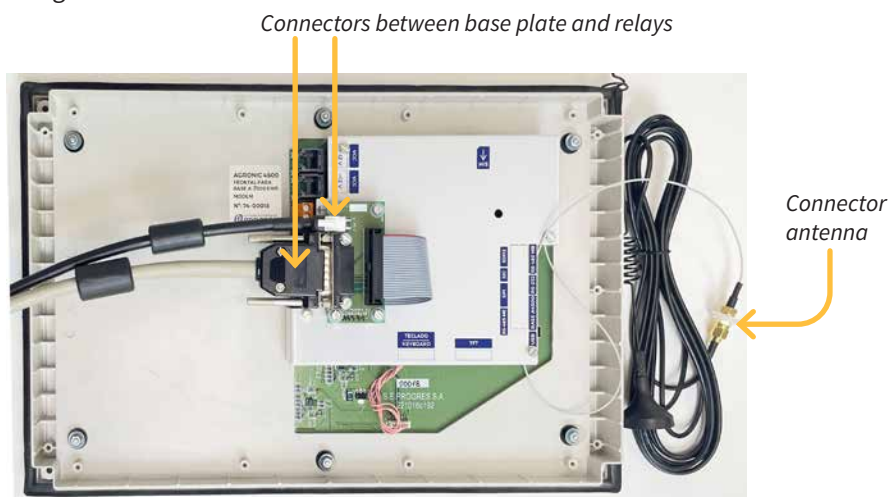

7 The antenna must be installed at a high point in order to have the best possible coverage or close to a window. Do not leave the antenna cable folded, stretch it out completely.

8 Important
Before powering the unit, connect the antenna cable.
Also necessary for units that do not use the modem.

MATERIAL TO RETURN

Agrónic 7000 front panel:

- Agrónic 7000 micro plate
- Agrónic 7000 keyboard
- GPRS modem (if the option is installed).